




**AT90SC28880RCFV2**

**Summary Datasheet**

**WIS@key**

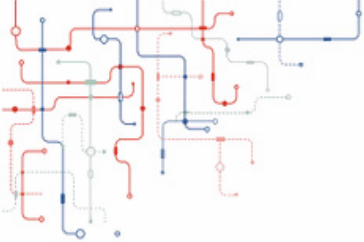

# Features

## General

- High-performance, Low-power 8/16-bit Enhanced RISC Architecture
  - 135 Powerful Instructions (Most Executed in a Single Clock Cycle)
- Low-power IDLE and LPW modes
- Bond Pad Locations Conforming to ISO 7816-2
- ESD Protection:  $\pm 5\text{kV}$  on ISO pins,  $\pm 4\text{kV}$  on RF pins
- Operating Ranges: 2.7V to 5.5V
- Compliant with ICAO ePassport Specifications (BAC, AA) and new European Passport Specifications (EAC)
- Compliant with EMV 4.3 Specifications; PC Industry Compatible
- Available in Wafers, Modules, Contactless Module or Inlay and Industry-standard Packages
- Compatible with Printed Antennas (losses from 10 to 20 Ohms)

## Memory


- 288K Bytes of ROM Program Memory Including 32K Bytes with Specific Access
- 80K Bytes of EEPROM, Including 128 OTP Bytes and 384 Bit-addressable Bytes
  - 1 to 128-byte Program/Erase
  - 1 ms Program, 1 ms Erase
  - Endurance: 500,000 Write/Erase Cycles at 25°C
  - 22 Years Data Retention at 25°C
  - EEPROM Erase Only Mode
  - Write EEPROM without or with Auto-Erase
- 8K Bytes of RAM + 256 Bytes of DMA dedicated RAM

## Contactless Mode

- Contactless Interface Controller (CIC) with Full Support for ISO/IEC 14443 Type B Protocol
- Compliant with ISO14443 and ISO10373-6 Specifications
- On-chip Tuning Capacitance: 100pF
- Baud Rates: 106, 212, 424 and 848 Kbps
- Very High Bit Rates (VHBR): 1.7, 3.4 and 6.8 Mbps for Card to Reader Communication.

## Peripherals

- One I/O Port
- One ISO 7816 controller
  - Up to 625 kbps at 5 MHz
  - Compliant with T = 0 and T = 1 Protocols
- Programmable Internal Oscillator (Up to 30 MHz for ad-X2™ and internal CPU Clock)
- Three 16-bit Timers
- Random Number Generator (RNG)
- 2-level, 8-vector Interrupt Controller
- Hardware DES and Triple DES 4 Keys, DPA, SPA and DEMA Resistant
- Hardware AES
- Code Signature Module
- CRC 16 & 32 Engine (Compliant with ISO/IEC 3309)
- 32-Bit Cryptographic Accelerator for Public Key Operations
  - RSA, DSA, ECC, Diffie-Hellman

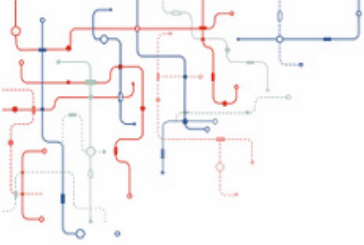

## Security

- Dedicated Hardware for Protection Against SPA / DPA / DEMA / SEMA Attacks
- Advanced Protection Against Physical Attack, Including Active Shield, EPO, CStackChecker, Slope Detector, and Parity Errors
- Environmental Protection Systems
  - Voltage, Frequency and Temperature Monitors
  - Light Protection
- Secure Memory Management/Access Protection (Supervisor Mode)
- Start on Internal Oscillator
- No External Clock for Contactless Mode

## Targeted Certifications

- Common Criteria EAL5+
- ZKA
- EMVCo
- FIPS 140-2

## Development Tools

- Voyager Emulation Platform (ATV4Plus) to Support Software Development
- IAR Embedded Workbench® V5.51 Debugger or Above
- Software Libraries and Application Notes

## Description

The AT90SC28880RCFV2 is a low-power, high-performance, 8/16-bit microcontroller with ROM program memory, EEPROM data memory and a crypto-accelerator, based on an enhanced RISC architecture.

By executing powerful instructions in a single clock cycle, the AT90SC28880RCFV2 achieves throughputs close to 1 MIPS per MHz. Its Harvard architecture includes 32 general-purpose working registers directly connected to the ALU, allowing two independent registers to be accessed in one single instruction executed in one clock cycle.


The AT90SC28880RCFV2 allows the linear addressing of up to 8M bytes of code and up to 16M bytes of data as well as a number of new functional and security features.

In addition to the 288K bytes of embedded ROM, the AT90SC28880RCFV2 features 80K bytes of high-performance EEPROM (fast erase/write time, high endurance).


The ability to map the EEPROM in the code space allows parts of the program memory to be reprogrammed in-system. This technology combined with the versatile 8/16-bit CPU on a monolithic chip provides a highly flexible and cost effective solution to many smart card applications. The cryptographic accelerator featured in the AT90SC28880RCFV2 is the ad-X2, a N-bit multiplier-accumulator dedicated to performing fast encryption and authentication functions. All cryptographic routines are executed on the CPU core which uses the ad-X2 accelerator during encryption/decryption. ad-X2 is based on a 32-bit technology, thus enabling fast computation and low power operation. ad-X2 supports standard finite fields arithmetic functions (including RSA, DSA, DH and ECC) and GF(2N) arithmetic functions (including ECC).

Additional security features include power, frequency and temperature protection logic, logical scrambling on program data and addresses, power analysis countermeasures, and memory accesses controlled by a supervisor mode.

A block diagram of the AT90SC28880RCFV2 is shown in Figure 1.

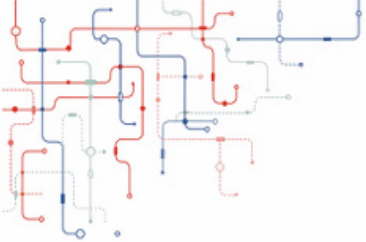

**Figure 1** AT90SC28880RCFV2 RISC CPU Core Architecture

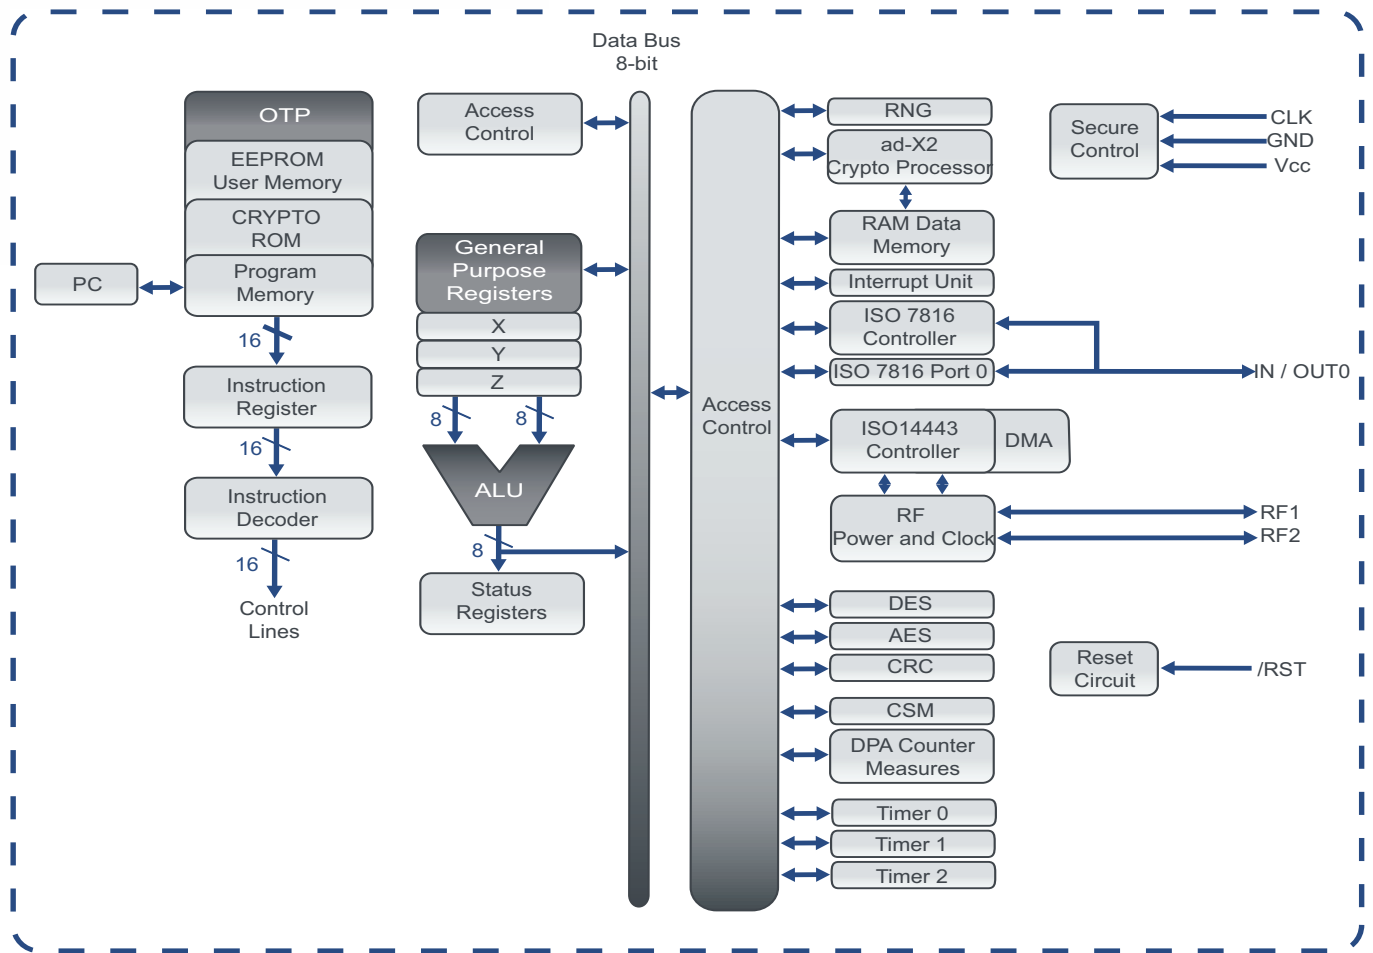

6621DS -- 26Sep16

The photographs and information contained in this document are not contractual and may be changed without notice. Brand and product names may be registered trademarks or trademarks of their respective holders.  
 Note: This is a summary document. A complete document will be available under NDA. For more information, please contact your local WiseKey sales office.